


# **VIKING EASY CUBE 3X3**

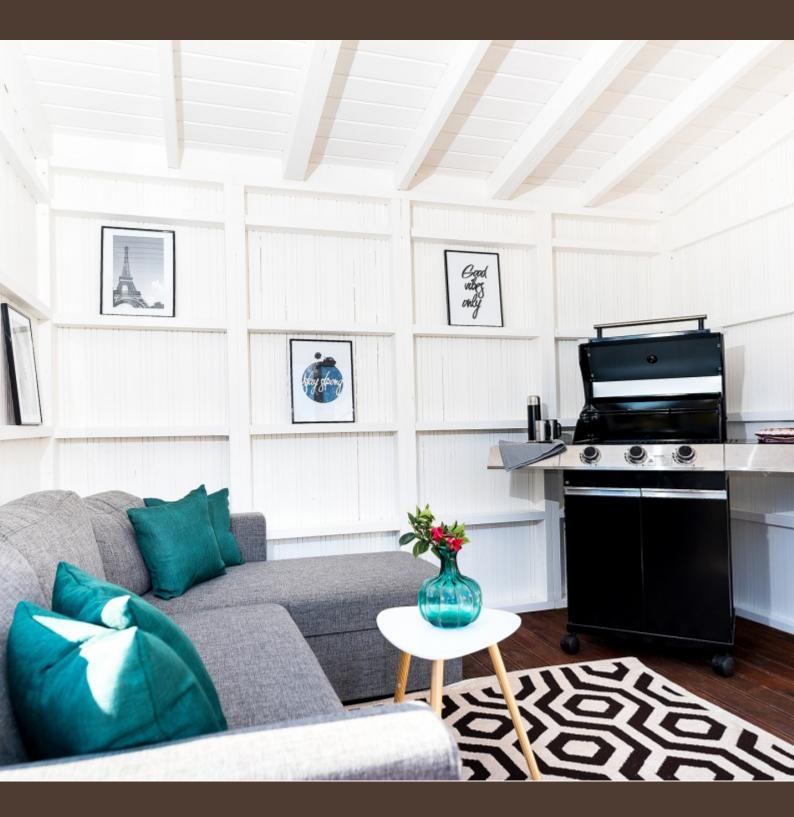

### PRODUCT DESCRIPTION

For the new Viking Easy Cube 3 x 3 m have been given special attention to high-speed and easy installation. This compact and bright product is designed as a multifunctional space where you can prepare food, spend your leisure. On a warm day, open large doors and enjoy unlimited beautiful weather, on a windy day you can admire the landscape from inside. The style and dimensions of this product fit perfectly into a new residential area, a rural landscape, or even a cottage environment.

#### **SPECIFICATIONS:**

**Roof.** The roof panels frame of  $45 \times 120$  mm is covered with  $18 \times 145$  mm finishing boards. This type of construction withstands 295 kg/m2 = 2,95 kN/m2. Easy Cube building roof is 2.9 m high and 10% slope. We use MIDA SELF KSK for the roof covering, its self-adhesive elastomeric bitumen membrane covering the entire surface. Installation of the rolled roofing is a quick, simple, and safe way to cover all Cube. All you must do is unroll, attach with nails, remove the protective film, and press.

**Walls.** The walls are made of spruce wood. Front and back wall frame  $45 \times 95$  mm with outside  $18 \times 145$  mm vertical finishing boards. Sidewall frame  $45 \times 45$  mm with outside  $18 \times 145$  mm vertical finishing boards. The bottom parts of the wall frames are impregnated.

**Aluminum 3 rails sliding doors system Alutech.** Sliding parts are framed with aluminum frames, manufactured from "cold" single-chamber of aluminum profile with non-insulating gaskets. The sliding of the aluminum frame is made so that the entire structure is stable. Frames wheels are designed for attachment to the motion and has aluminum profiles for vertical and horizontal adjustment, provides a particularly easy movement of moving parts. Sealing brush prevents dust from entering the structure and compensates for vibration in the wind. All moving parts are very easy to remove and put it back, so there is no problem with cleaning glass from the outside. In the closed position system has automatically locked and unlocked positions. Handles and locks built into the aluminum profile, so during the opening, the glass always remains clean. This is single-chamber aluminum system. The thickness of tempered glass 4 mm.

**Aluminium glass wall "Alutech".** Panel size is 1000 x 2200 mm; Frame wide: 40 mm; Glazing: single glass; Glass thickness: 4 mm. Color: metallic/white.



# **SPECIFICATION**

People	6 persons
Timber	Spruce
Shape	Rectangle
Room	1
Inside area	9.0 m <sup>2</sup>
Total height	2855 mm
Exterior Cladding	18 mm
External dimension	3286 x 3154 mm
Door size	3000 x 2200 mm
Window size	1000 x 2200 mm

### **STANDARD SET**

Roof panels from spruce;		
Self-adhesive bitumen membrane for roof covering;		
Dead de au and original acception (include in an		
Wall papels from spruce with impregnated bottom parts:		
2 pcs of aluminum glass wall Alutech (1000 x 2200 mm).		
1 nc of aluminum sliding doors system Alutach (3 rails)		
DELIVERY		
Size of pallets (LxWxH)	3.4 x 1.2 x 2.5 m	
Weight	900 kg	
	• • • • • • • • • • • • • • • • • • • •	

Viking Easy cube  $3 \times 3$  m is delivered to the customer **not assembled**, but with detailed assembly instructions and drawings, and packed on a pallet (KIT).

### **OPTIONS**

### **FLOOR FOR VIKING EASY CUBES**

- Terrace floor made from corrugated spruce wood with frame;Tongue and groove floors.






## **ACCESSORIES**





Rainwater Pipes\*


## **DRAWINGS**

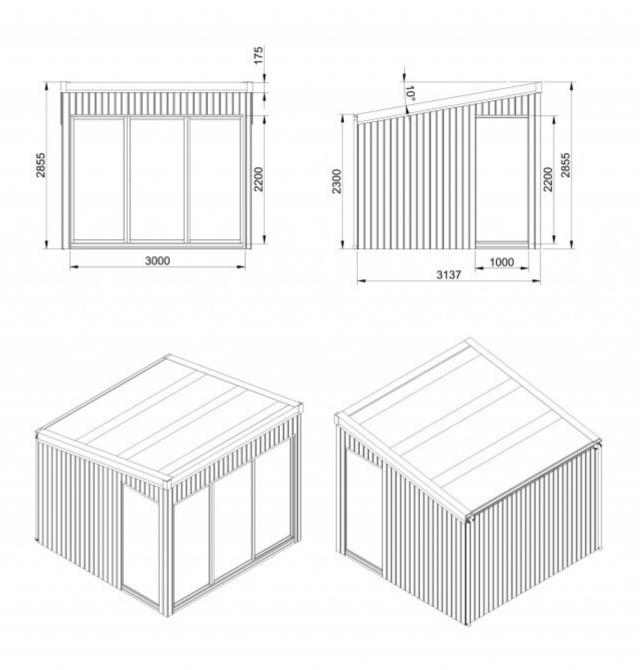


### **DRAWINGS**

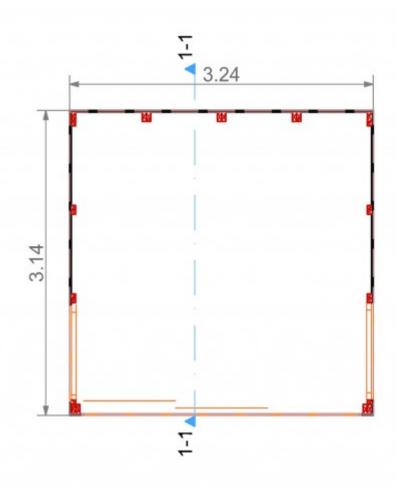

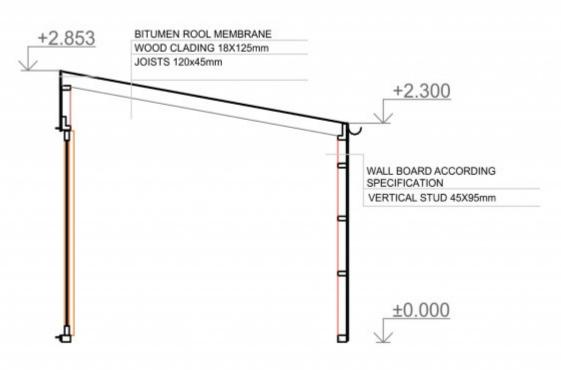

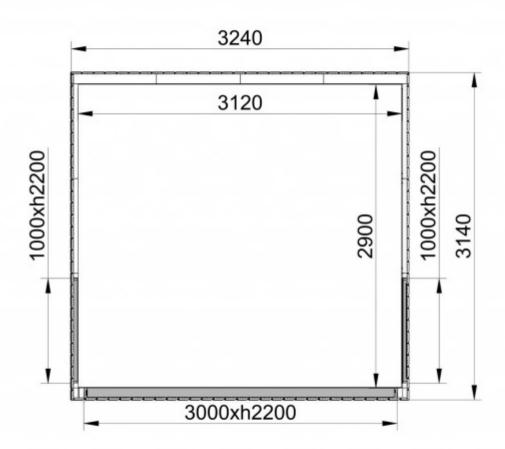

#### **FOUNDATION**

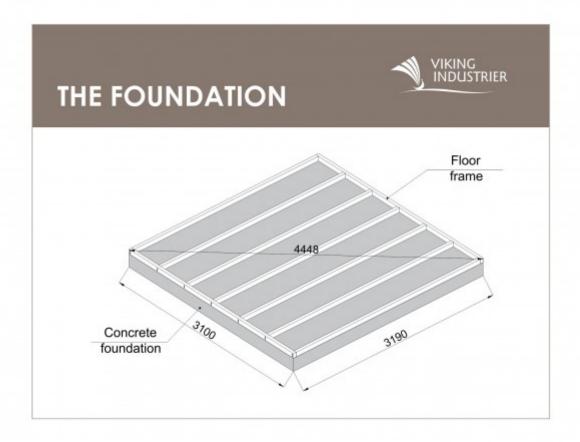

It is very important to have a proper base for your Easy Cube. Therefore, we recommend following our sketches and consulting a qualified local builder or engineer. Making sure that the base for your product fits the location is of utmost importance. Due to an improper base, the structure may crack. If the product is unevenly seated, the geometric shape of the building may change, which can result in the door/windows twisting, and/or gaps. In the worst-case scenario, the product may even collapse.

- Before building the base, make sure you take into account the landscape and the ground conditions on which the product will stand.
- The base under the product must be prepared specifically for the product.
- The base must be homogeneous, tight, and level.
- Make sure that the properties of the base do not change over time. We recommend making the base out of concrete and water-proofing it before installation.

If you do not follow recommendations for building the base, the product will lose its warranty!

## **COLOR CARD**





### **EXTERIOR WOOD STAIN COLORS**

Water-based, quick drying premium total protection for wood outside. Thin layer varnish – 3 in 1: impregnation, primer, and varnish!



**PLEASE NOTE:** The colors shown in the catalogue and website may not 100% match the color you will receive. The color of the wood material affects the final color.

## **COLOR CARD**





### **EXTERIOR WOOD PAINT COLORS**

Weather protection, water-based paints. High-performance and environmentally friendly.



**PLEASE NOTE:** The colors shown in the catalogue and website may not 100% match the color you will receive. The color of the wood material affects the final color.

#### **PAINTING**

# **AUTOMATIC MACHINE SPRAY TECHNOLOGY**Benefits

One of the main and most obvious benefits of using a paint machine is the speed and flexibility at which we can suggest our painting service for all of our products. A spray paint machine can get the work done faster and more consistently than manually painting. While the machine works faster, it improves quality too – sprayers produce an even coat of paint, leaving a high-quality finish. With our painting service from now, we can suggest our client's maximum flexibility! Not assembled products such as Grill cabins, Pavilions, Camping pods, and other products of any size you can order painted too!

#### **PROFESSIONAL SPRAY**

The high-quality preservative finish is professionally spray applied in the factory to three sides of the wood. The product is treated in your choice of color (one color for all product).

**STAIN | PAINT**Which type of paint should I Use?

Properly painting and impregnating is one of the most important things to consider when thinking about how to extend your product's lifetime.

Paint and natural wood finish instantly spruce up the aesthetics of your product.

The decision you will need to make is if you want to use a water-based wood stain or paint. Both will offer you UV protection. The wood stains will allow the texture of the wood to show through and many are now available in a vast range of colors, however, paints will give you an intensive color, but will cover the grain and texture of the wood.

#### **USAGE AND MAINTENANCE**

#### Things to note when using the product:

- Products which are used for staying overnight should be equipped with a smoke alarm and a extinguisher;
- Product owner is responsible for the security and should work out a rescue plan for the camping site;
- Remember that using heating appliances or temporary camping stoves this isn't just a fire risk, but a risk of carbon monoxide poisoning as well.

**MAINTENANCE.** You should not forget that wood is a natural material, it changes move depending on weather conditions. Large and small cracks, color tone differences and changes, as well as a changing structure of wood are not errors, but a result of wood growing and a feature of wood as a natural material. Natural wood (not impregnated) becomes grayish after having been left untouched for a while and can be turn blue and become moldy. You should immediately process them with wood impregnations to protect the wooden details of our produced products.

- Like any our product, our produced furniture's needs to be looked after and processed with a wood impregnation agent or painted if you want it to last for years. Regular cleaning of your furniture is necessary to prevent mold. General warm soapy water is enough if done regularly;
- If necessary, outside doors must be adjusted by the customer;
- If you do not use your Camping Product often we highly recommend to use the installation of our vent to stop condensation;
- If you find a sap pocket open during the life of your Product you can allow it to dry naturally and then cut the sap off with a blade.



Misko 25, LT-85302 Venta, Lithuania info@vikingindustrier.com