

PAVILION WITH LARGE WINDOWS

10 M²



PRODUCT DESCRIPTION

A highlight in your garden! Barbecue, party in the garden, or family breakfast: with a cozy entertaining space you can enjoy your garden in almost any weather. It offers protection against too much sun, rain, and wind. This new model is one of the three Pavilions in the 10 m² range. It has: eight walls like all 10 m² Pavilions, a classic roof, a height of about three meters, floor panels of separate components, seven big windows with top vent, wide double doors and a lot of light – these are the basic ingredients for our new trend model! Pavilion offers flexible space and many customers use them as an extra room to have a delicious dinner, fine wine, candles flickering in the warm cozy garden room.



SPECIFICATION

People	8-10 persons
Timber	Spruce
Shape	Octagonal
Room	1
Inside area	10.0 m ²
Diameter	3764 mm
Total height	3330 mm
Wall height	2050 mm
Floor thickness	18 mm
Roof thickness	18 mm
Wall thickness	45 mm
External dimension	3477 x 3477 mm
Door size	1290 x 1800 mm
Window size	1300 x 1810; vent (1 pc) 565 x 565 mm

STANDARD SET

- Roof covered with bitumen shingles of your selected color;
- Roof with metal hood and decorative ball on top;
- The finish of the roof edge with straight standard siding;
- Wall, roof panels from spruce;
- Floor panels from separate components;
- 7 double glass till ground windows;
- 3 top opening vents in different sides of windows;
- Windows tin finishing;
- Double doors with a lock and windows.


DELIVERY

Assembling time	12 hours
Size of pallets (LxWxH)	3.00 x 1.20 x 2.50 m
Weight	1400 kg

~ We pack all accessories on the same pallet if it is possible. Otherwise all accessories will be packed on a separate pallet.

OPTIONS

AVAILABLE ROOF COLOR



Black shingles



Green shingles




Red shingles

TOP OPENING VENT WINDOWS FOR PAVILION

- 3 top vent opening windows from 7 (standard);
- 4 top vent opening windows from 7;
- 5 top vent opening windows from 7;
- 6 top vent opening windows from 7;
- 7 top vent opening windows from 7.



ACCESSORIES

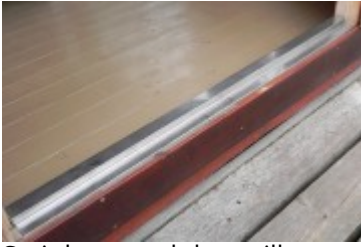

Stainless steel door sill




White linen curtains set for
Pavilion



Brown curtains set for
Pavilion

FOUNDATION

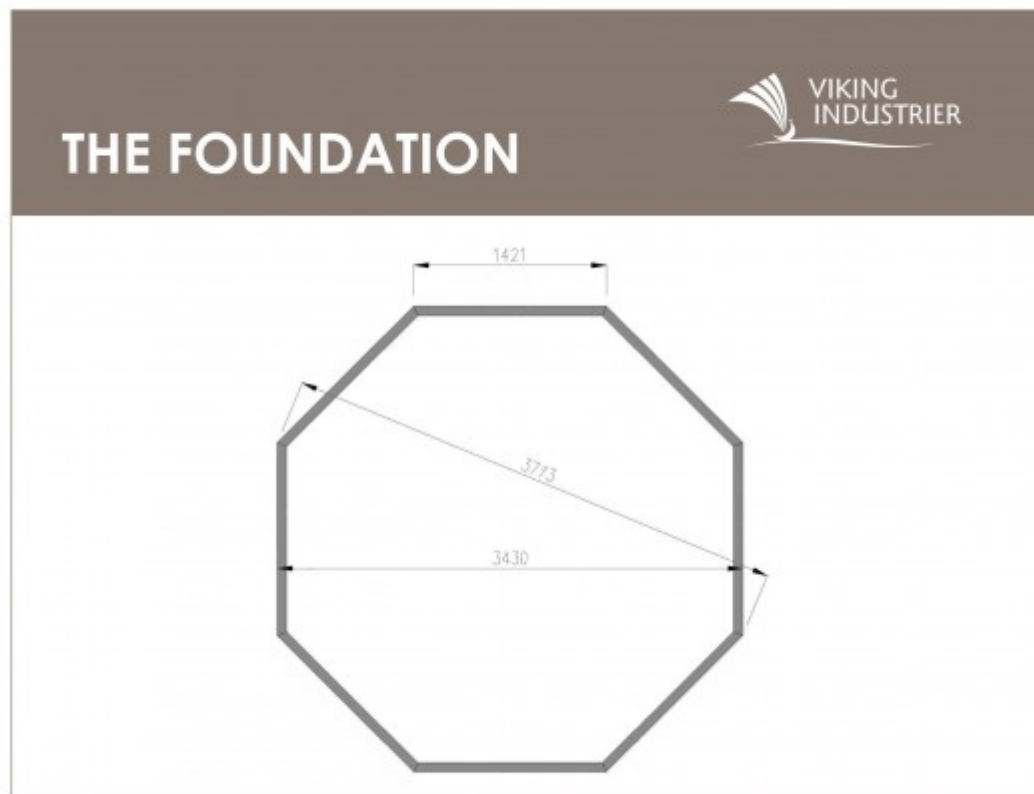

It is very important to have a proper base for your Pavilion. Therefore, we recommend following our sketches and consulting a qualified local builder or engineer. Making sure that the base for your product fits the location is of utmost importance.

Due to an improper base, the structure may crack. If the product is unevenly seated, the geometric shape of the building may change, which can result in the door/windows twisting, and/or gaps. In the worst-case scenario, the product may even collapse.

- Before building the base, make sure you take into account the landscape and the ground conditions on which the product will stand.
- The base under the product must be prepared specifically for the Pavilion.
- The base must be homogeneous, tight and level.
- Make sure that the properties of the base do not change over time. We recommend making the base out of concrete and water-proofing it before installation.


If you do not follow recommendations for building the base, the product will lose its warranty!

PAINTING


COLOR CARD

EXTERIOR WOOD STAIN COLORS

Water-based, quick drying premium total protection for wood outside.
Thin layer varnish – 3 in 1: impregnation, primer, and varnish!

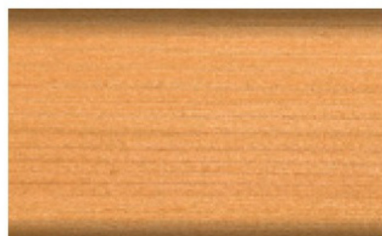


PINE / LARCH RC260

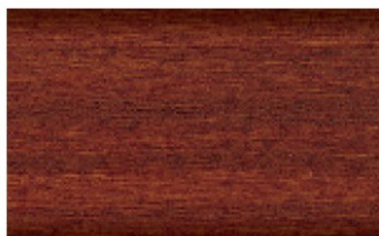


TEAK RC545




CHESTNUT RC555

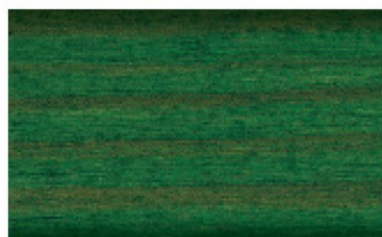

FIR GREEN RC960

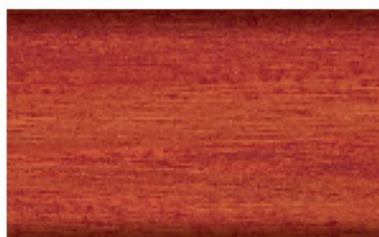


MAHAGONY RC565

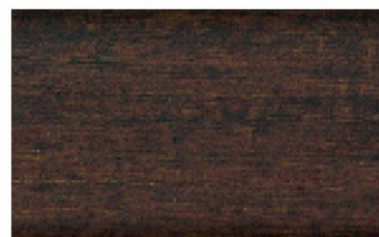

PALISANDER RC720




SILVER GREY RC970

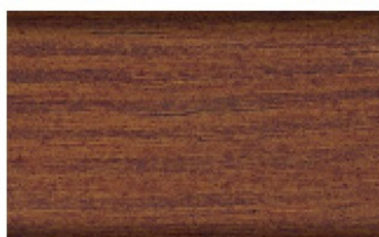

NUT WOOD RC660



PINE RC270

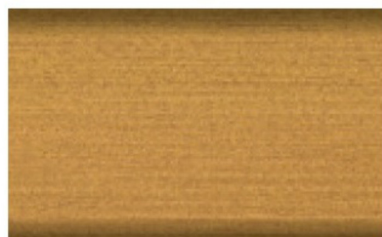

RUSTIC OAK RC360




LIGHT OAK RC365




HEMLOCK RC120



WHITE RC990

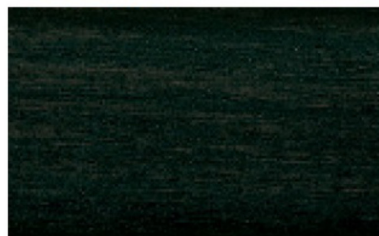

EBONY RC790

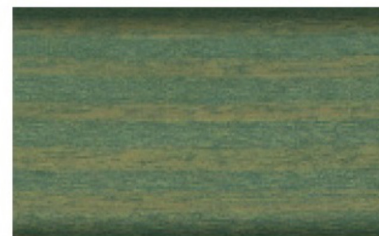

SALT GREEN RC965


PLEASE NOTE: The colors shown in the catalogue and website may not 100% match the color you will receive.
The color of the wood material affects the final color.

PAINTING

COLOR CARD

EXTERIOR WOOD PAINT COLORS


Weather protection, water-based paints. High-performance and environmentally friendly.



WHITE / RAL 9016



ANTRACITE GREY / RAL 7016



LIGHT GREY / RAL 7035



DUSTY GREY / RAL 7037



OXIDE RED / RAL 3009



JET BLACK / RAL 9005



MOSS GREEN / RAL 6005



AZURE BLUE / RAL 5009



GREY BROWN / RAL 8019



BROWN RED / RAL 3011

PLEASE NOTE: The colors shown in the catalogue and website may not 100% match the color you will receive. The color of the wood material affects the final color.

PAINTING

AUTOMATIC MACHINE SPRAY TECHNOLOGY

Benefits

One of the main and most obvious benefits of using a paint machine is the speed and flexibility at which we can suggest our painting service for all of our products. A spray paint machine can get the work done faster and more consistently than manually painting. While the machine works faster, it improves quality too – sprayers produce an even coat of paint, leaving a high-quality finish. With our painting service from now, we can suggest to our client maximum flexibility! Not assembled products such as Grill cabins, Pavilions, Camping pods, and other products of any size you can order painted too!

PROFESSIONAL SPRAY

The high-quality preservative finish is professionally spray applied in the factory to three sides of the wood. The product is treated in your choice of color. You can choose two colors for one product: one for almost all product details and another for finishing details.

STAIN | PAINT

Which type of paint should I Use?

Properly painting and impregnating is one of the most important things to consider when thinking about how to extend your product's lifetime. Paint and natural wood finish instantly spruce up the aesthetics of your product. The decision you will need to make is if you want to use a water-based wood stain or paint. Both will offer you UV protection. The wood stains will allow the texture of the wood to show through and many are now available in a vast range of colors, however, paints will give you an intensive color, but will cover the grain and texture of the wood.

USAGE AND MAINTENANCE

GRILL USAGE.

- **The first time you'll use your Grill the surfaces of the new product that are in direct contact with the flames may create a smoky smell when heating up.** We advise to keep the door open during the first use and not to cook until the smell disappears.
- When burning wood we recommend to use a Grill table metal safety fence.
- We suggest you use only firewood or briquettes. Larger burning objects can be added later when the fire is burning well. We advise to use objects no larger than 300 mm.
- A sufficient flow of fresh air is the most essential aspect of smoke exhaustion. At least as much fresh air should come in as goes out with the smoke.
- If the Grill is generating a lot of smoke, open the door of the Pavilion and make sure that the wood is dry and without a bark. Put in additional dry wood if needed.
- Keep decorations away from your Grill. Hanging decorations look pretty, but provide fuel for a fire.
- Keep water nearby for flare-ups.
- **Keep a fire extinguisher within a couple of steps of your Grill.** And KNOW HOW TO USE IT!
- **Don't leave a Grill unattended.** Don't allow kids or pets to play near the Grill. Never try to move the hot Grill, and remember the Grill will stay hot for at least an hour after its use.
- Do not sleep in Pavilion when the fire is on!
- Use protective gloves when handling hot cooking plates. **Never move or service an operating Grill.**
- Please note, that the metal Grill may have sharp edges and the steel parts of the Grill heats up when the fire is burning, therefore there is a risk to harm or burn yourself.
- Remove ashes from the Grill after they have cooled down.
- Make sure you give yourself time to clean your Grill after each use in order to ensure maximum hygiene and proper functioning.

MAINTENANCE.

You should not forget that wood is a natural material, it changes and moves depending on weather conditions. Large and small cracks, color tone differences and other changes, as well as a changing structure of wood are not defects, but a result of wood growing and a feature of wood as a natural material. Natural wood (not impregnated) becomes greyish after being left untouched for a while and can turn blue and become mouldy. You should immediately process it with a wood preservative to protect the wooden parts of our manufactured products.

We definitely recommend that you process the door and windows with a wood preservative, and do it on both sides (inside and outside) because the doors and windows can deform. Also, you should pre-treat the floor panels with a wood preservative, especially the bottom sides of the panels, to which you will no longer have access when the Pavilion is assembled. Only this will prevent moisture penetration.

In general, we recommend for the conclusive finishing a weather protection paint that will protect the wood from moisture and UV radiation after the Pavilion is assembled. Consult a specialist regarding paints suitable for unprocessed softwood and follow the paint manufacturer's instructions. Your Pavilion service life will be much longer after it will be properly painted. **We recommend that you inspect your Pavilion thoroughly once every six months.**

The customer should make sure that air circulation is working in winter as well. It means that air pipes are open all year round and that moisture gets out from the product (through the chimney). The customer should also make sure that the product's roof is not covered by snow. A layer of snow cannot be thicker than 20 cm on the roof and the flue should never be covered by snow or closed manually.



Misko 25, LT-85302 Venta, Lithuania
info@vikingindustrier.com

www.vikingindustrier.com